




COMPACT SAFE FOR
LOCATIONS WITH
FREQUENT TURNOVER
OF OCCUPANCY

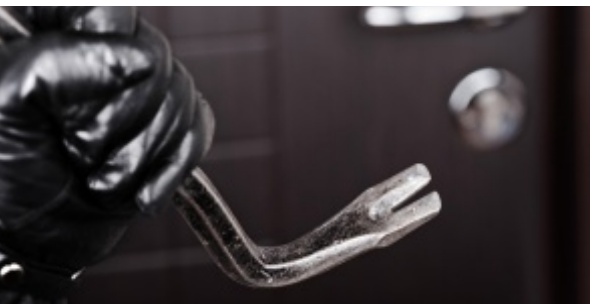

AIR HOTEL

BURGLARY PROTECTION FOR YOUR VALUABLES




KEY FEATURES

- Compact safe for hotel rooms, student accommodation or other locations with frequent turnover of occupancy.
- Steel door and body with dual, plated steel moving boltwork.
- User-friendly electronic lock.
- Authorised control and access via electronic lock or hand-held programming unit.

AIR HOTEL

PRODUCT SPECIFICATIONS

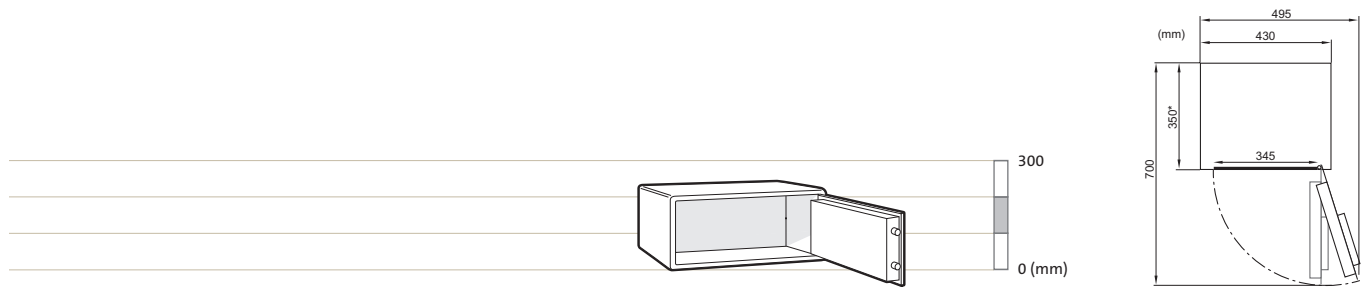

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-25	200	430	350	190	420	300	24	12

*Lock projection (10mm) not included.

LOCKS



The safe is fitted with an electronic lock. The code for the electronic lock is set by the user when closing the safe. The user simply leaves the safe door open when checking out to allow the next user to set a new user code.

MASTER CODE

The lock will accept a programmable master code allowing authorised control and access. The master code also allows access to an event memory function, the audit trail. This audit trail can be downloaded onto a PC or Laptop.

AUDIT TRAIL

A 105 event history can be read via the keypad and LCD display showing the time, date and method used to open the safe. The lock can be opened with a user code, a master code or an emergency override key.

EMERGENCY OPENING

In the event of an electronic failure or the battery running out of power, a mechanical override key can be used to emergency-open the lock.

HAND HELD PROGRAMMING UNIT

A master code can be set for the safe using the optional hand-held programming unit. This allows an additional authorised entry method for an approved individual either as a result of a forgotten user.

Authorised dealer

CONSTRUCTION

BOLTWORK

One-way moving boltwork with two 16mm, plated steel bolts.

DOOR & BODY

The door is made 4 mm-thick steel, the body is made of 2 mm-thick steel.

ANCHORING

The anchoring kit (supplied) securely mounts the safe, preventing it from being removed. The safe has four anchoring holes in the base, each 7.5mm in diameter. Bolts are supplied for masonry fitting, alternative bolts may need to be sourced depending upon the base to which the safe is fitted.

INSTALLATION GUIDE

(See illustration above)

Maximum door height clearance 135mm. Please allow 25mm for keypad projection.

www.chubbsafes.com

The data given in this material may be subject to change without prior notice. This document is not contractually binding. The 'Chubb' brand is owned by Chubb plc and is a registered trademark used under license. See www.chubbsafes.com for more information.